



SPINEX

Top down spinnaker furler

SPINEX: overview

- > 4 models available: SPINEX 0.9, SPINEX 1.5, SPINEX 2.5, SPINEX 5.0
- > For boat lengths of 5 to 18 m and asymmetric spinnakers
- > Delivered as standard: anti-twist cable, end fittings, high-density spheres
- > SPIN KIT available separately, fits NEX furlers
- > Uses Profurl technology
- > Three-year Profurl international warranty
- > Patented system

ADVANTAGES TO USING SPINEX

> SAIL BEARING TECHNOLOGY: EFFICIENT, RELIABLE FURLING

Problem: Because asymmetric spinnaker cloth is both light and fragile, the anti-twist cable has a tendency to damage it. Also, the cable spins faster than the sail during furling which means the latter sometimes jams.

Profurl solution: Sail Bearing Technology comprises high-density spheres that spin freely around the anti-twist cable in order to protect the sail from the cable. Sail Bearing Technology allows you to:

- keep the sail away from the cable
- stop reverse furling, which causes the sail to jam
- reduce wear of the sailcloth
- make furling easier and faster because it has a greater diameter than the cable on its own

> A COMPLETE SYSTEM READY TO USE


- SPINEX comes with drum, swivel, cable, end fittings, tack swivel, etc.
- Except for the length of the cable, SPINEX is ready to fit and ready to use out of the box.

> MULTI-PURPOSE AND ADAPTABLE

- Remove the tack swivel and turn your SPINEX into a NEX ready to use with gennakers and code zeros.
- Profurl's SPIN KIT fits on NEX furlers.

> OTHER ADVANTAGES:

- Compatible with NEX technology, such as I-Connect, Safe System, etc.
- Improved safety when worked from the cockpit or short-handed.
- Requires little storage space.
- System compatible with all types of asymmetric spinnakers.

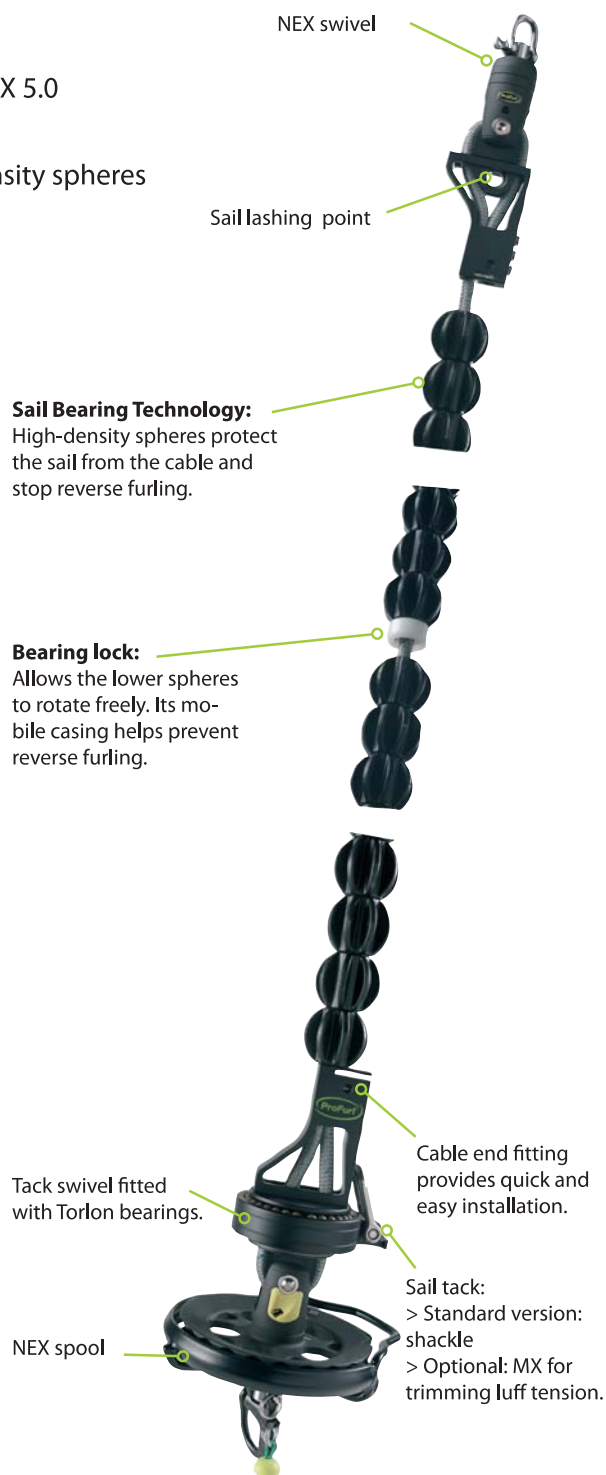

CHOOSE THE RIGHT SPINEX FOR YOU (5–18 M BOATS):

	SPINEX 0.9	SPINEX 1.5	SPINEX 2.5	SPINEX 5.0
Boat length (not contractual)	up to 9 m	up to 11 m	up to 14 m	up to 18 m
Sail area recommended	up to 50 m ²	up to 80 m ²	up to 130 m ²	up to 250 m ²
Maximum working load	900 Kg	1500 Kg	2500 Kg	5000 Kg
Spool diameter	100 mm	120 mm	150 mm	195 mm
Lower end fitting	Clevis pin snap shackle			
Upper end fitting	D shackle		Halyard shackle MX8 or MX10	
Anti-twist cable Ø	9.5 mm	9.5 mm	12.7 mm	12.7 mm
Cable length delivered as standard	14 m	17 m	20 m	25 m
Weight of cable & spheres per m	0.450 Kg / m	0.450 Kg / m	0.460 Kg / m	0.460Kg / m

*: The working loads shown are the maximum working loads of the mechanisms (spool and swivel) only and are not the loads of the complete system when terminals are included. The product should not be used above these working loads in any circumstances.


SPINEX: content



SPIN KIT: Use Profurl's SPIN KIT to turn NEX furlers into asymmetric spinnaker furlers. SPIN KIT includes anti-twist cable, spheres, and upper and lower end fittings.

	SPIN 0.9	SPIN 1.5	SPIN 2.5	SPIN 5.0
Boat length (not contractual)	up to 9 m	up to 11 m	up to 14 m	up to 18 m
Part #NEX	NEX 0.9	NEX 1.5	NEX 2.5	NEX 5.0
Cable length delivered as standard	14 m	17 m	20 m	25 m

Top down furler concept description

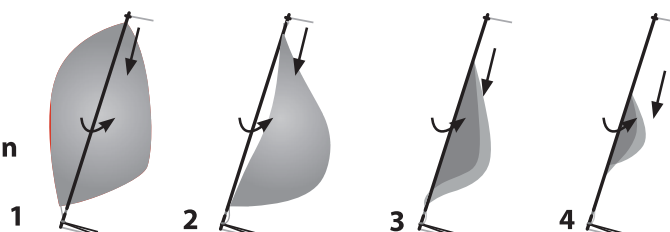

WICHARD S.A.S
ZI de Felet - CS 50085
63307 Thiers Cedex
France
Tel +33 (0)4 73 51 65 00
Fax +33 (0)4 73 80 62 81
E-mail: marine@wichard.com

Hotline and Technical Support, After Sales
Z.A Pornichet Atlantique
16 av du Gulf Stream
44380 Pornichet - France
Tel +33 (0)2 51 76 00 35
Fax +33 (0)2 40 01 40 43
E-mail : hotline@wichard.com

WICHARD, Inc.
148a Bryce Blvd
Fairfax - VT05454 - USA
Tel: +1 (401) 683-5055
Fax: +1 (802) 655-4689
Toll free number: +1 866 621 1062
E-mail: info@wichard-usa.com

WICHARD Pacific Pty Ltd
PO Box 104 St Peters NSW 2044
Australia
Phone: +61 2 9516 0677
Fax: +61 2 9516 0688
Toll free number: 1800 639 767
E-mail: info@wichard.com.au

profurl.com

indice B - P130G813