


Round pad eye - Dia 95 mm - M12 screw

Part #6638

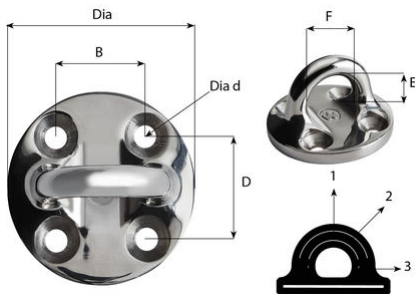

Description

This fixed rounded pad-eye completes the range of fixed pad eyes and thus it can suit any user scenario. For example, it can be used for reefing blocks, fastening points on bowsprits and on blocks. Made from Duplex stainless steel, it offers excellent mechanical strength for its corrosion resistance. For M12 screw.

W.L.1 (90°) : 5250 Kg
W.L.2 (45°) : 5080 Kg
W.L.3 (0°) : 4360 Kg
B.L.1 (90°) : 12260 Kg
B.L.2 (45°) : 12180 Kg
B.L.3 (0°) : 104500 Kg
AVAILABILITY: MARCH 2023

Applications

Reefing blocks
Fastening points on bowsprit
Blocks fastening

Technical information

Materials	Duplex stainless steel grade
Weight (g)	700
A (mm)	95
B (mm)	44
D (mm)	48
E (mm)	26
F (mm)	42

Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.
The safety factor is 5 times the breaking load.
WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.