

Back

Zambezi Quattro

LED Surface Mount Underwater Light

Leveraging the SeaBlaze Quattro, Zambezi Quattro is the perfect match for larger pontoon boats, aluminum skiffs, and floating docks. Choose from white/blue dual color or the vivid Spectrum output, each delivering more than 2,000 lumens and stunning color. Completely sealed with no external drivers. Self-isolating from metallic mounting surfaces to prevent galvanic corrosion. Perfect for typical transducer/accessory brackets.

Specifications:

Lumens:	6000+
CCT:	6500K
CRI:	70+
Voltage:	10-30vDC
Rated Watts:	60
IP Rating	IP68
Housing	Bronze

Key Features:

- Available in full-color spectrum with color cycle mode or dual-color white/blue with cross fade mode.
- Completely water sealed and IP68 compliant.
- Completely surface mountable - NO wiring through-hull holes required with simple 2-wire hook up.
- PLI Enabled - Poco System Compatible
- Constructed of marine grade bronze and heat tempered glass.
- Over 2,000+ hour of rigorous ASTM-B117 Salt Spray Chamber testing.
- Proudly designed and manufactured in the USA.
- 3 Year warranty on all Lumitec products.

Product Details:

SKU	COLOR OUTPUT	CRI*	CCT*	VOLTAGE	12VDC	24VDC	LUMENS†
101708	Dual-Color White/Blue Cross Fade, Non-Dim	70+	6500	10-30vDC	5A	2.5A	6000
101700	Spectrum RGBW	70+	6500	10-30vDC	5A	2.5A	6000

* Lumens, CRI & CCT applies only to white light.

† Integrating sphere measured lumens within 1 minute of initial startup

Features:



Certifications:





Beam Pattern:


Zambezi X2 - LED Surface Mount Underwater Light

Zambezi X2 - Flood Pattern

Illuminance at a Distance			
	Center Beam fc	Beam Width	
4.3ft	417 fc	1.3 ft	8.3 ft
8.7ft	102 fc	2.7 ft	16.9 ft
13.0ft	45.6 fc	4.0 ft	25.2 ft
17.3ft	25.8 fc	5.3 ft	33.5 ft
21.7ft	16.4 fc	6.6 ft	42.1 ft
26.0ft	11.4 fc	7.9 ft	50.4 ft

■ Vert. Spread: 17.4°
■ Horiz. Spread: 88.2°

Illuminance at distance

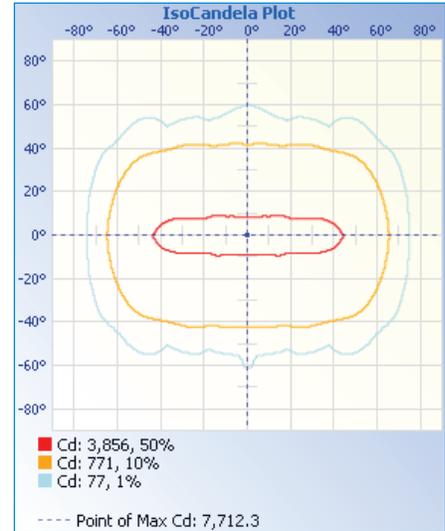

Iso Candela Plot

Dimensions:

Diameter: 4in (10.16cm)
 Depth: 1.6in (4.06cm)

