



Specifications:

Voltage:	10-30vDC
Max Current Draw:	2.5 Amps (RGBW output)
IP Rating:	IP67, Completely Sealed
Housing:	UV Resistant Composite Plastic

Key Features:

- Control third-party RGBW devices via TTP or Pico module.
- Idea solution to control lighted speakers through Pico System.
- Single C4 module can control multiple speakers (up to 2.5A max).
- Does not require a Pico module (TTP operation).
- Completely water sealed. IP67 compliant.
- 3 Year warranty - proudly designed and manufactured in the USA.

Other Available Expansion Modules:

Pico C4 - provides Pico or TTP control of third-party RGB or RGBW lighting accessories. This means that everything from lighted speakers to cupholders can be controlled through the Pico system. On vessels not equipped with the Pico system, the Pico C4 provides control of color and intensity through any normal on/off switch, using Lumitec's field-proven TTP protocol.

Pico P1 - acts as an in-line solid-state relay, controlling any large load up to 20 Amps with on/off and PWM dimming control. When used in conjunction with a Pico module, lights and other loads can be controlled through an on-board MFD, smartphone or tablet.

Poco C4 Expansion Module

Pico Expansion Modules are designed to expand the capabilities of the already powerful Pico Digital Lighting Control system:

Pico C4 - provides Pico or TTP control of third-party RGB or RGBW lighting accessories. This means that everything from lighted speakers to cupholders can be controlled through the Pico system. On vessels not equipped with the Pico system, the Pico C4 provides control of color and intensity through any normal on/off switch, using Lumitec's field-proven TTP protocol.

Product Details:

SKU	POCO CONNECTION	Amps	VOLTAGE
101609	Required	2.5A Max	10-30vDC

Features:






Dimensions:

Pico C4 - Expansion Module

Width: 1.92in (4.87cm)

Height: 2.71in (6.89cm)

Depth: 0.66in (1.69cm)

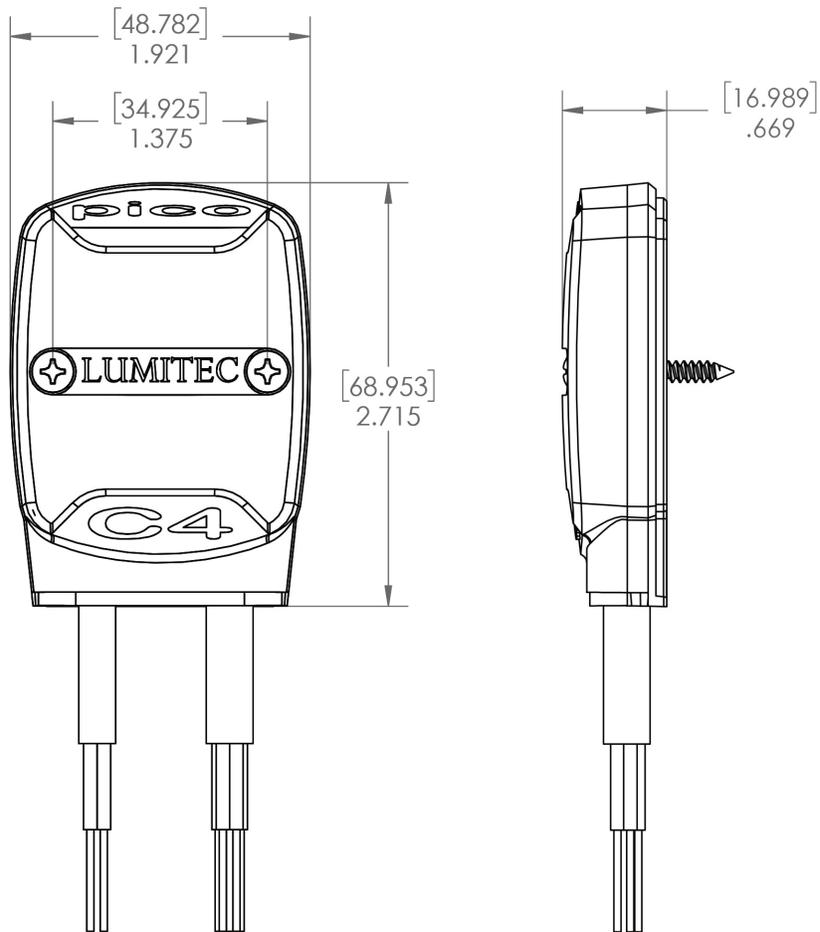

Module Connection Example

