



Now Poco Compatible with New 3-wire Configuration.

Available with Black Housing



Maxillume h60 LED Flood Light

Customers with high expectations, from the world's top custom yacht builders to the US Coast Guard, have relied on Lumitec's Maxillume line of flood lights for nearly a decade. Packing more than 6,000 TRUE lumens†, the Maxillume h60 boasts twice the output of previous models, new mounting options and our tried and tested internal dimmer control. Each light is designed, hand assembled, and tested at our USA manufacturing facility. Completely water sealed (IP67 compliant).

Specifications:

Lumens:	6000+ (white)
CCT:	5000K
CRI:	70+
Voltage:	10-30vDC
Rated Watts:	60W
IP Rating	IP67
Housing	Die-Cast Aluminum

Key Features:

- Over 6,000+ lumens of darkness piercing output.
- PLI Enabled (Poco Compatible).
- Completely water sealed and IP67 compliant.
- Easy Installation – platform, vehicle or boat mountable.
- Available with two mounting options (trunnion or surface).
- Constructed of marine grade powder coated cast aluminum and heat tempered glass.
- Designed for salt water environments with over 2,000+ hour of rigorous ASTM-B-117 Salt Spray Chamber testing.
- Proudly designed and manufactured in the USA.
- 3 Year warranty on all Lumitec products

Product Details:

Trunnion Mount

SKU	COLOR OUTPUT	HOUSING	CRI*	CCT*	VOLTAGE	12VDC	24VDC	LUMENS†
101334	White Dimming	White	70+	5000	10-30vDC	5A	2.5A	6000
101335	White Dimming	Black	70+	5000	10-30vDC	5A	2.5A	6000

Flush Mount

101336	White Dimming	White	70+	5000	10-30vDC	5A	2.5A	6000
--------	---------------	-------	-----	------	----------	----	------	------

* Lumens, CRI & CCT applies only to white light.

† Integrating sphere measured lumens within 1 minute of initial startup

Features:



Lumen Output



Power Line Instruction



Timed Toggle Protocol



Color Match Commitment



3-Wire Hookup



Dimming



3 Year Warranty



Certifications:



IP Rated



European Conformity

Ph. + (561) 272-9840 | lumiteclighting.com



Beam Pattern:


Maxillum h60 - LED FloodLight

Maxillum h60- Flood Pattern

Illuminance at a Distance			
	Center Beam fc	Beam Width	
8.3ft	228 fc	3.5 ft	3.7 ft
16.7ft	56.2 fc	7.1 ft	7.5 ft
25.0ft	25.1 fc	10.6 ft	11.3 ft
33.3ft	14.1 fc	14.1 ft	15.0 ft
41.7ft	9.01 fc	17.7 ft	18.8 ft
50.0ft	6.27 fc	21.2 ft	22.6 ft

■ Vert. Spread: 24.0°
■ Horiz. Spread: 25.4°

Illuminance at Distance

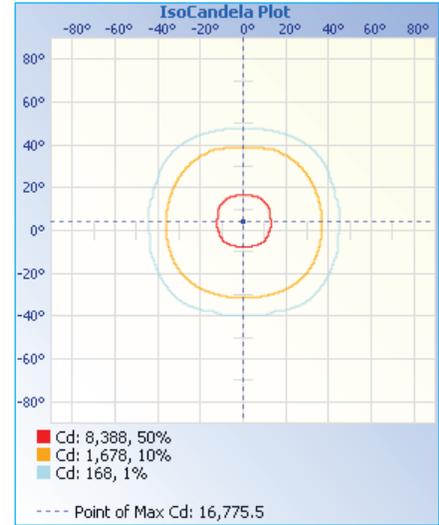

Iso Candela Plot

Dimensions:

- Width: 7.13in (18.11cm)
- Height: 3.03in (7.69 cm)
- Depth: 2.49in (6.32cm)

