

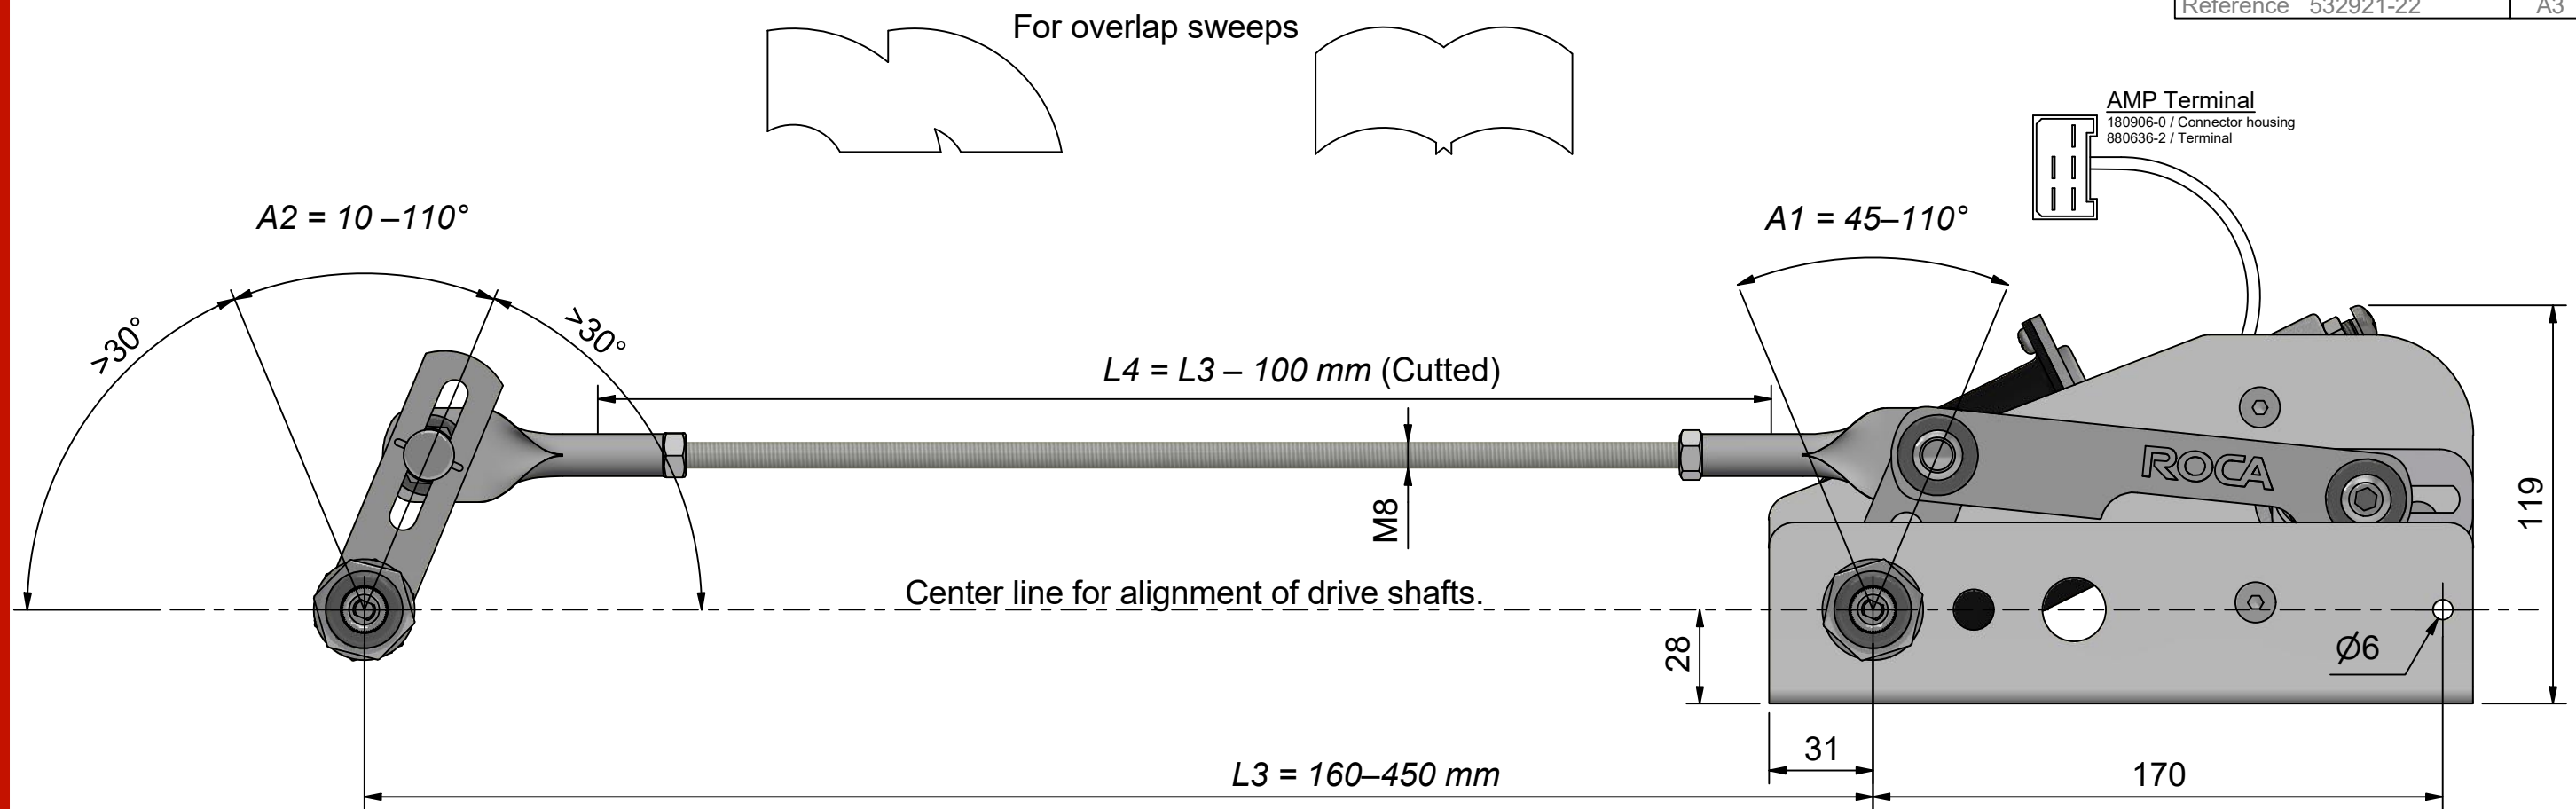


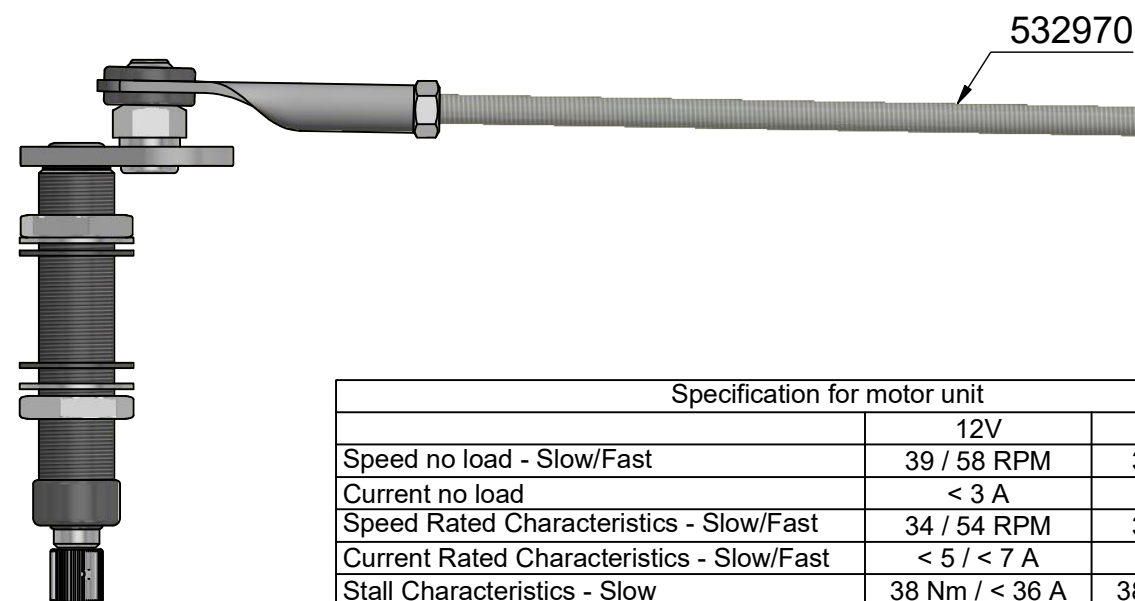

| Table    |      |    |    |                  |          |           |           |
|----------|------|----|----|------------------|----------|-----------|-----------|
| Item no. | Volt | L1 | L2 | L3               | L4       | A1        | A2        |
| 532911   | 12   | 28 | 70 | 160 - 450 (750)* | L3 - 100 | 45 - 110° | 10 - 110° |
| 532912   | 24   | 28 | 70 | 160 - 450 (750)* | L3 - 100 | 45 - 110° | 10 - 110° |
| 532921   | 12   | 53 | 95 | 160 - 450 (750)* | L3 - 100 | 45 - 110° | 10 - 110° |
| 532922   | 24   | 53 | 95 | 160 - 450 (750)* | L3 - 100 | 45 - 110° | 10 - 110° |

Note: 532970 Threaded shaft sold separate.  
\*) With extension part 532975

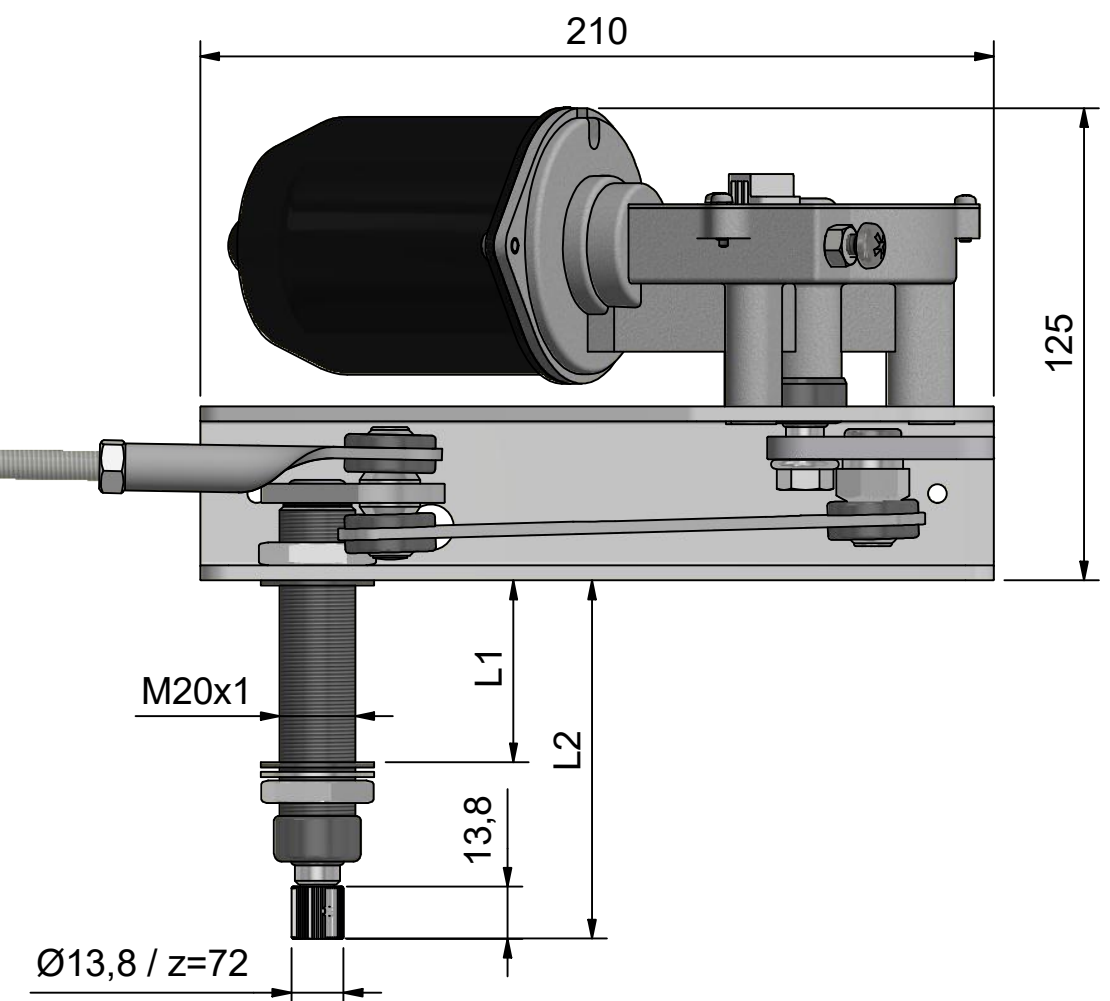

| Specification for motor unit              |                |                |
|-------------------------------------------|----------------|----------------|
|                                           | 12V            | 24V            |
| Speed no load - Slow/Fast                 | 39 / 58 RPM    | 39 / 58 RPM    |
| Current no load                           | < 3 A          | < 2 A          |
| Speed Rated Characteristics - Slow/Fast   | 34 / 54 RPM    | 34 / 54 RPM    |
| Current Rated Characteristics - Slow/Fast | < 5 / < 7 A    | < 3 / < 4 A    |
| Stall Characteristics - Slow              | 38 Nm / < 36 A | 38 Nm / < 18 A |
| Dynamic park circuit                      | Yes            | Yes            |
| Insulated ground                          | Yes            | Yes            |
| CISPER 25 class 1                         | Yes            | Yes            |