

For NC machining:-

Outlines below saved as
CL835-Cutout-revA.dxf

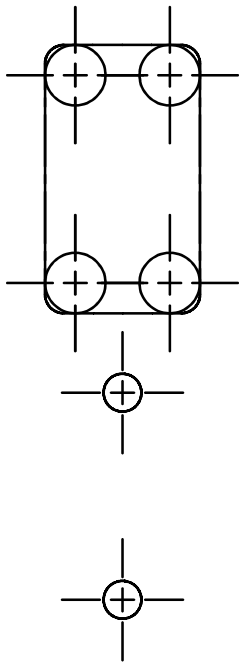

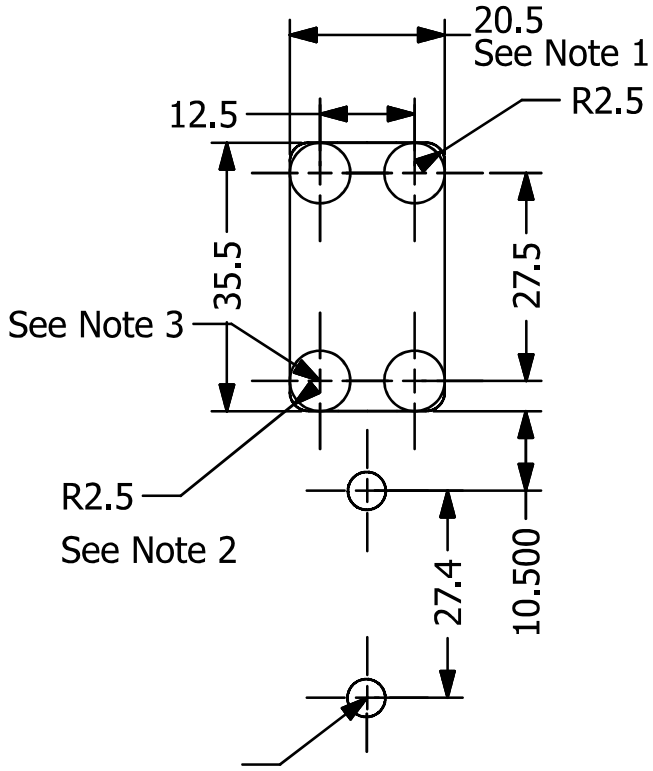


Drill mounting holes
a suitable size for selected
fasteners

For fitting by hand:-

Note 1.
For cutting by hand, finish to the inside of the line for largest poles.
Finish to the outside of the line for smallest poles.
To CNC, finish width as dimensioned.

Note 2.
Corner radii of cutout at this end only may be increased to 5mm if required without affecting fit.

Note 3.
8mm drilling holes with centres shown to drill to fit a jigsaw blade.

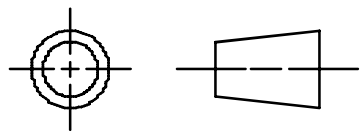

ALL DIMENSIONS IN MM

DRAWN BY	SLW	2/12/24
APPROVED BY		

REV	DATE	DESCRIPTION	BY

TITLE

Pole Cutouts for CL835

(This page prints full size on A4 or US letter paper)

Clamcleat® Rope cleats
© Clamcleats Ltd
Watchmead, Welwyn Garden City
Hertfordshire, AI7 1AP, England
Tel +44 (0)1707 330101 clamcleat.com

DWG NO. CL835-Cutouts (metric)

SHEET REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF CLAMCLEATS LTD. USE OR REPRODUCTION IN WHOLE OR PART IS PROHIBITED WITHOUT EXPRESS WRITTEN PERMISSION. CONTRAVENTION WILL RESULT IN PROSECUTION. ALL RIGHTS ARE RESERVED.

SCALE 1:1 | VOL (CC): | SHEET 1 OF 1