
Wichard, 1 ZI de Felet, CS 50085, 63307 Thiers, France
Tél: +33 (0)4 73 51 65 00 — E-mail: marine@wichard.com

Fairlead padeye - Dia 10 mm

Part #6616



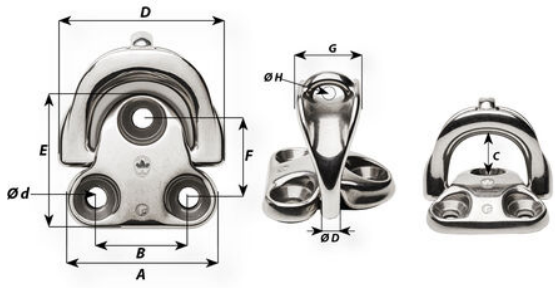

Description

Fairlead folding padeye with dedicated design
Optimized design to prevent rope wear
Becket feature for 2/1 purchase
Reduced footprint (less assembly parts)
For 12 mm rope

Applications

Flying sail furler tensioning
Inhauler trimming
Removable stay
Can not be used for structural applications

Technical information

	Materials	Stainless steel grade
⛵	Working load (kg)	3200
	Breaking load (kg)	6400
	Weight (g)	453
	A (mm)	75
	B (mm)	45
	C (mm)	26
	D (mm)	81
	d diameter (mm)	10
	D diameter (mm)	10
	E (mm)	68
	F (mm)	39
	G (mm)	32
	H (mm)	10

Caption

⛵ Working load (WL) : for nautical applications

🏭 Working Load Limit (WLL): for industrial applications only.
The safety factor is 5 times the breaking load.
WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.

© Wichard 2020-2025