
Wichard, 1 ZI de Felet, CS 50085, 63307 Thiers, France
Tél: +33 (0)4 73 51 65 00 — E-mail: marine@wichard.com

MXLEvo 12 - Soft block - Rope size 12 mm

Part #21105



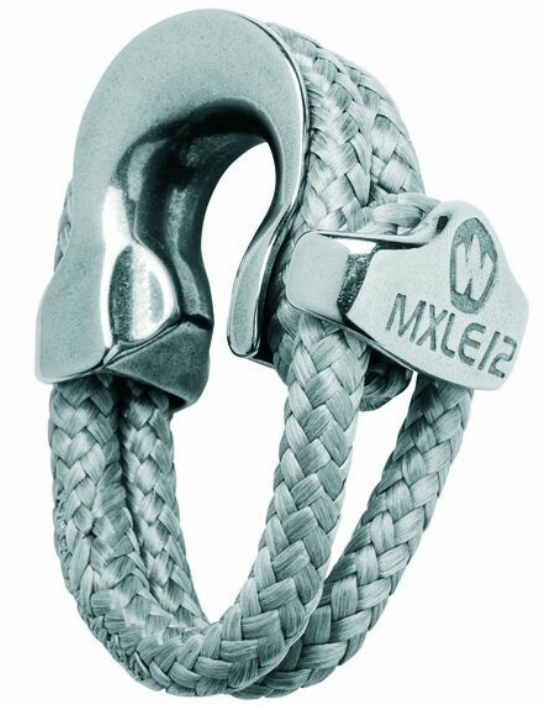

Description

Wichard is proud to present the MXLEvo: a soft block solution designed for all yachtsmen, whether amateur or pro. Designed for heavy load applications (mast foot, halyard tackle, barber hauler, snatch blocks, etc.), this system is available in three sizes.

Economical and easy to use:
Delivered complete with a Dyneema SK78 loop, you don't need any specific technical knowledge to use the MXLEvo. It can be installed quickly and easily on any type of anchoring (chain plate, head ropes, etc.).
The rope housing keeps the ropes inside the block when there is no load on the system. The MXLEvo offers excellent value for money. It is one of the cheapest soft blocks on the market.

Heavy load applications:
The MXLEvo is designed to be used with heavier loads (low rope movement speed). As such, it is the perfect solution for use as: a mast foot block, halyard tackle, barber hauler, block and tackle, sheet return, large sail foot, etc.).

Lightweight, robust and highly compact:
MXLEvo provides exceptional resistance for its weight. In comparison with a standard competitor's block, The MXLEvo 10 is:
- twice as robust
- half the weight
- a third of the size
- For a breaking load of 5 tonnes, the MXLEvo 16 is 35% lighter.

A reliable solution with no need for maintenance:
As it does not contain any moving parts (such as a sheave), the MXLEvo is extremely reliable and requires no maintenance.

Adaptable to your deck plan
The loop on the MXLEvo can be positioned in one of two ways, making it easily adaptable to your deck and to whatever anchoring point or chain plate alignment you choose.

Applications

Mast foot block
Halyard block
Barberhauler
Purchase
Tackle
sheet return
Mainsail outhaul
Snatch block: in that case it is recommended to use a 8 mm rope size

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated in this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.

© Wichard 2020-2025

Technical information

	Materials	Duplex stainless steel grade S78 Dyneema®
	Rope size	Pour cordage de 12 mm
	Length (mm)	40
	Width (mm)	54
	Thickness (mm)	35
	Loop diameter (mm)	5
	Loop length (mm)	220
	Working load (kg)	1600
	Breaking load (kg)	3800
	Weight (g)	90

Caption

 Working load (WL) : for nautical applications

 Working Load Limit (WLL): for industrial applications only.
The safety factor is 5 times the breaking load.
WLL = Breaking load / 5