



## Mirage - Square

### LED Flush Mount Down Light

Lumitec's Mirage down lights remain the best-performing down light in the category. Delivering incredible output and a profile that is among the slimmest in the industry. Completely sealed and IP67 rated, Mirage is perfectly suited for indoor or outdoor overhead lighting needs. Mirage's square bezel design blends harmoniously with today's more contemporary interior designs and is available in a variety of output colors, including architectural-grade High CRI warm white and Full-Color Spectrum.

#### Specifications:

Lumens:	226-305 (white)
CCT:	3000-5000K
CRI:	70-90+
Voltage:	10-30vDC
Rated Watts:	6
IP Rating	IP67
Housing	Stainless Steel Bezel

#### Key Features:

- Multi-color output options including full-color spectrum.
- Shallow mounting depth with flush mount exterior surface.
- Completely water sealed and IP67 compliant for interior or exterior use.
- Available with three bezel designs, polished, white of just glass.
- Easy Installation – simple 2-wire hook up with clip in place design.
- Over 2,000+ hour of rigorous ASTMB-117 Salt Spray Chamber testing.
- Proudly designed and manufactured in the USA.
- 3 Year warranty on all Lumitec products.

#### Product Details:

White	Glass	Polished	COLOR OUTPUT	CRI*	CCT*	VOLTAGE	12vdc	24vdc	LUMENS†
116128	116198	116118	White Dimming, Red, Blue, Non-Dimming	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
116129	116199	116119	Warm White, Dimming	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
116127	116197	116117	Spectrum (Non 3PD)	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)

\* Lumens, CRI & CCT applies only to white light.

† Integrating sphere measured lumens within 1 minute of initial startup

#### Features:



#### Certifications:



IP Rated



European Conformity



**Beam Pattern:**


**Mirage - LED Flush Mount Down Light**

**Mirage- Beam Pattern**

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
1.7ft	64.8 fc	2.8 ft	3.0 ft
3.3ft	17.2 fc	5.4 ft	5.7 ft
5.0ft	7.49 fc	8.3 ft	8.7 ft
6.7ft	4.17 fc	11.1 ft	11.7 ft
8.3ft	2.72 fc	13.7 ft	14.4 ft
10.0ft	1.87 fc	16.5 ft	17.4 ft

■ Vert. Spread: 79.1°  
■ Horiz. Spread: 82.1°

Illuminance at Distance

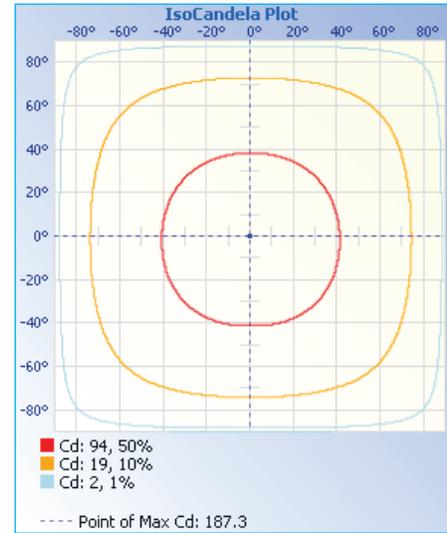

Iso Candela Plot

**Dimensions:**

- Height: 3.45 in (8.67 cm)
- Width: 3.45 in (8.67 cm)
- Depth: 1.00 in (2.54 cm)

