
Wichard, 1 ZI de Felet, CS 50085, 63307 Thiers, France
Tél: +33 (0)4 73 51 65 00 — E-mail: marine@wichard.com

Folding pad eye - Dia 6 mm

Part #6604



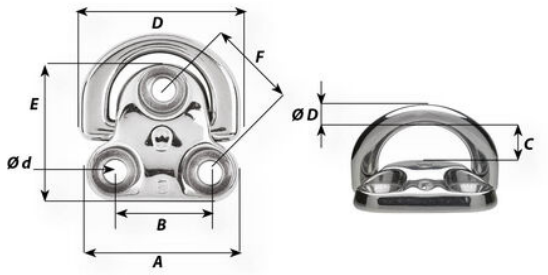

Description

Perfect solution for fastening applications (stay, blocks, jib tack point, lifeline, tether etc...)
Fully dropforged product with outstanding working and breaking loads regardless the angle of the load
Modern and optimized design to suit aesthetics of modern boats
They can be fold down to minimize the risk of injuries
The silicon pad eliminates noise and unpleasant vibrations
Modern design

Applications

For any fastening/attachment application: shroud, stay, blocks, lifeline, jib tack point etc...)

Technical information

	Materials	17.4 pH stainless steel 316L stainless steel grade
⛵	Working load (kg)	1440
	Breaking load (kg)	3000
	Weight (g)	78
	A (mm)	45
	B (mm)	27
	C (mm)	15
	D (mm)	44
	d diameter (mm)	6
	D diameter (mm)	6
	E (mm)	41
	F (mm)	27

Caption

⛵ Working load (WL) : for nautical applications

Working Load Limit (WLL): for industrial applications only.
The safety factor is 5 times the breaking load.
WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.

© Wichard 2020-2025